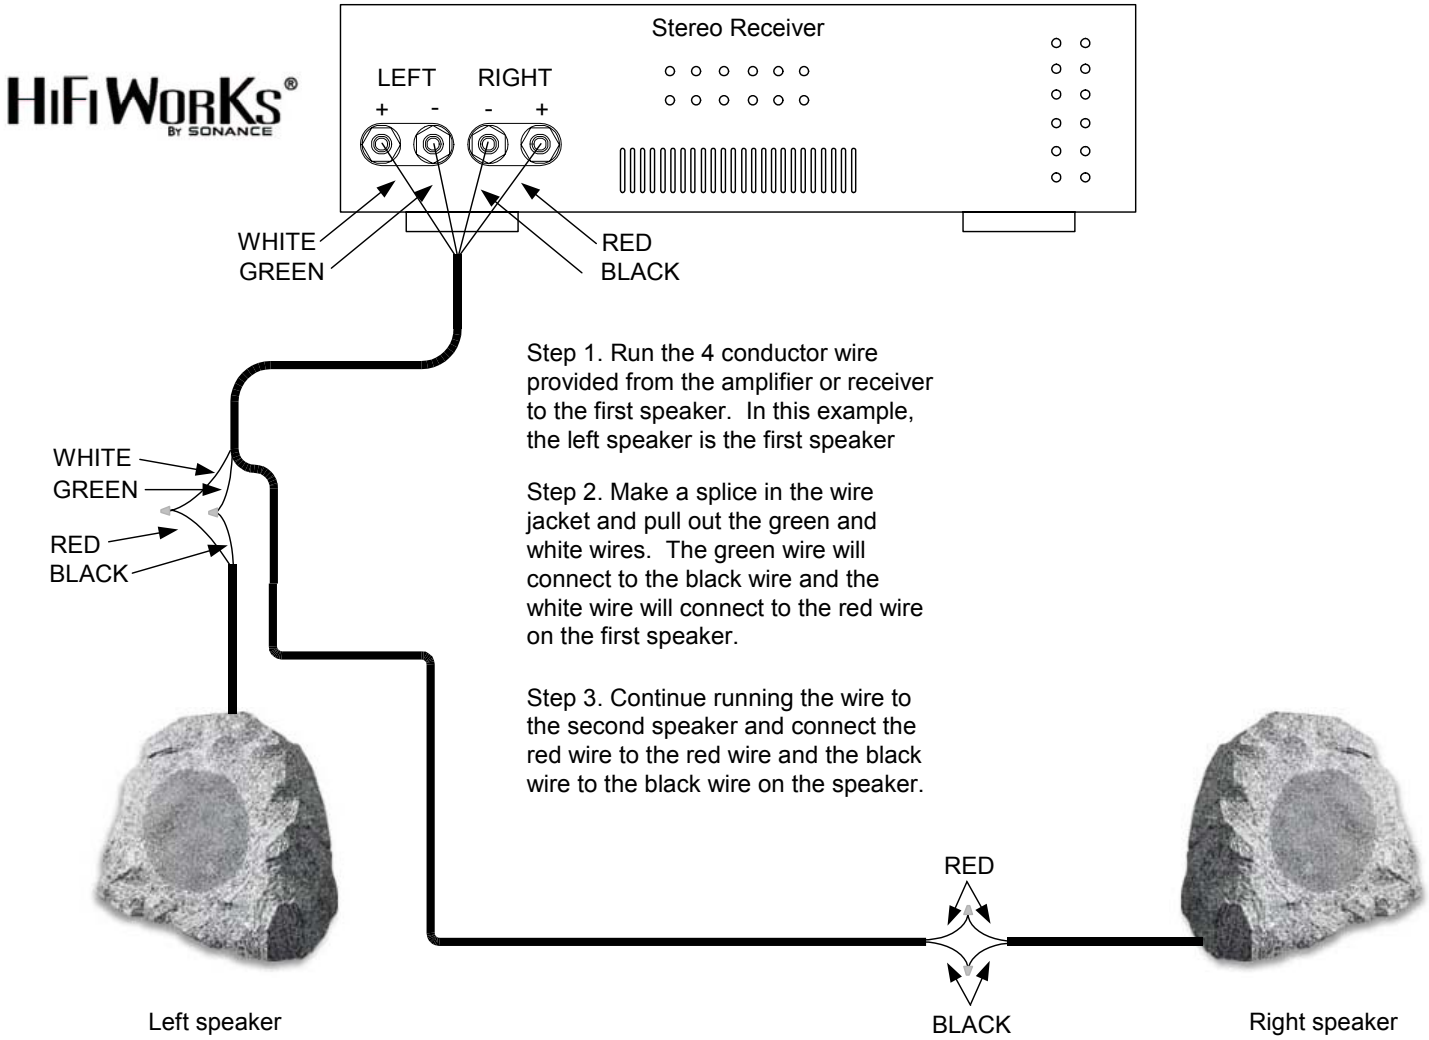
HiFiWorks®
By SONANCE
Stereo Receiver
LEFT
RIGHT
+ - - +
WHITE
GREEN
RED
BLACK
Step 1. Run the 4 conductor wire provided from the amplifier or receiver to the first speaker. In this example, the left speaker is the first speaker
Step 2. Make a splice in the wire jacket and pull out the green and white wires. The green wire will connect to the black wire and the white wire will connect to the red wire on the first speaker.
Step 3. Continue running the wire to the second speaker and connect the red wire to the red wire and the black wire to the black wire on the speaker.
WHITE
GREEN
RED
BLACK
RED
BLACK
Left speaker
Right speaker

333137